

Koyo®

**Bearings and Related Products
for Continuous Casting Machines**



JTEKT
JTEKT CORPORATION

Bearings and Related Products for Continuous Casting Machines

Introduction

In continuous casting machines, roll support bearings are used under heavy loads and at extremely low speed. In addition, the operating conditions are severe, resulting in exposure to splashing water and scales.


Accordingly, roll support bearings may be failed in an extremely short period of time, typically due to wear and cracking.

To solve these problems, **JTEKT** has developed a series of products optimized to support the rolls of continuous casting machines, including bearings, oil seals, HSC (Half Split Cylindrical Roller) bearing units and Oil/Air lubrication systems, providing a systematic solution for extending the service life of bearings in this application.

Contents

| | |
|--|---|
| Introduction | 1 |
| 1. Failure mechanism of Bearing | 2 |
| 2. High performance Products and Their Features | |
| (1) Roll support bearings | 3 |
| (2) HSC bearing units with half round outer ring | 4 |
| (3) Oil seals for roll support housings | 5 |
| (4) Oil/Air lubrication system | 6 |
| 3. Dimensions Tables | |
| SC and SCP Bearings | 7 |
| HSC Bearing Units with Half round Outer Ring | 9 |

■ Typical Arrangement of Roll Support Bearings in Continuous Casting Machines

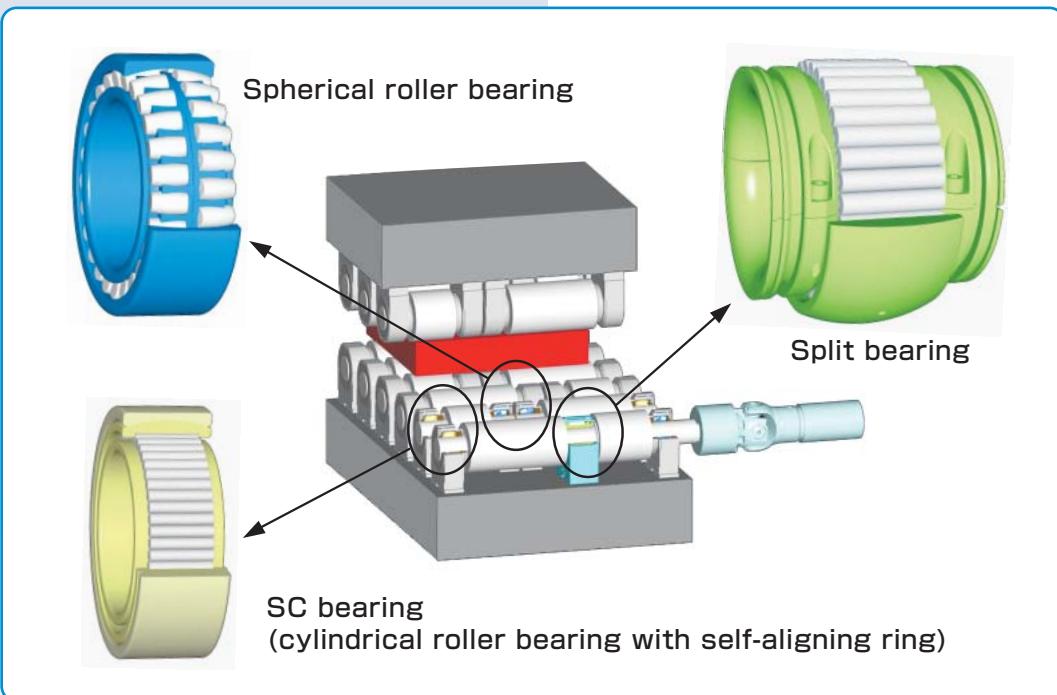

1. Failure mechanism of Bearing

In continuous casting machines, rolls are loaded under excessively heavy loads and may be bent considerably. Accordingly, to support the rolls, spherical roller bearings, which have a self-aligning, are commonly used.

JTEKT has performed a variety of verification tests and analyses concerning this application, and concluded that differential slip occurs in the spherical roller bearings on the rolls of the continuous casting machines when excessively heavy loads at extremely low speed are imposed on the bearings under severe lubrication conditions (Refer to Fig. 1). **JTEKT** therefore recommends full complement cylindrical roller bearings for this application.


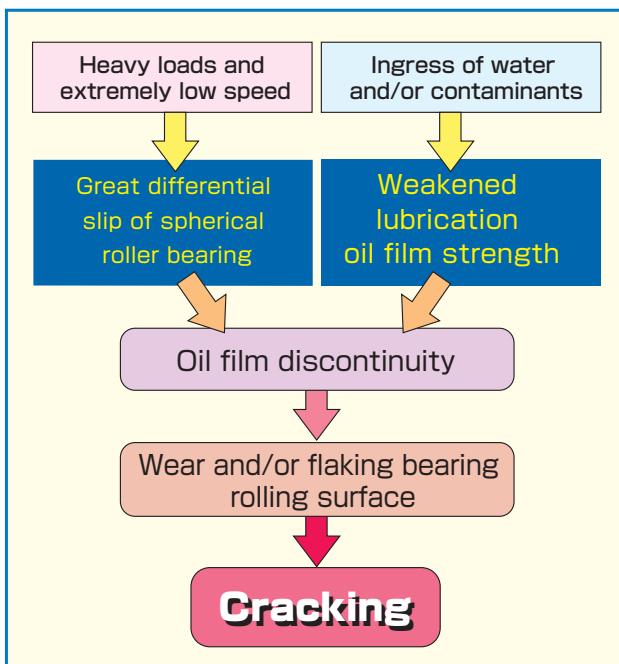


Fig. 1 Typical Failure Mechanism of Roll Support Bearing in Continuous Casting Machines

● Spherical roller bearing



Contact surface between roller and outer ring




When a spherical roller bearing is loaded, elastic deformation occurs on the contact surface between each roller and bearing raceway, producing an elliptical contact surface. This oval surface causes differential slip, which is attributed to the rolling mechanism of the spherical roller bearing.

Under normal load conditions, this differential sliding is negligible. However, under the excessively heavy loads, the major axis of the contact ellipse may become excessively enlarged, resulting in an increase in slip rate.

● Cylindrical roller bearing (with self aligning ring)



Contact surface between roller and outer ring



When a cylindrical roller bearing is used to carry the loads, differential slip does not occur on the contact surface.

Fig. 2 Differential Slip of Spherical Roller Bearing

Wear on outer ring raceway surface



Flaking on outer ring raceway surface



Cracking on outer ring



Fig. 3 Typical failure to Spherical Roller Bearings Supporting the Rolls of Continuous Casting Machines

Bearings and Related Products for Continuous Casting Machines

2. High performance Products and Their Features

(1) Roll support bearings

Compared with spherical roller bearings, cylindrical roller bearings do not produce differential slip on the contact surface between each roller and bearing raceway under the excessively heavy loads, delaying the development of wear and thus extending bearing service life.

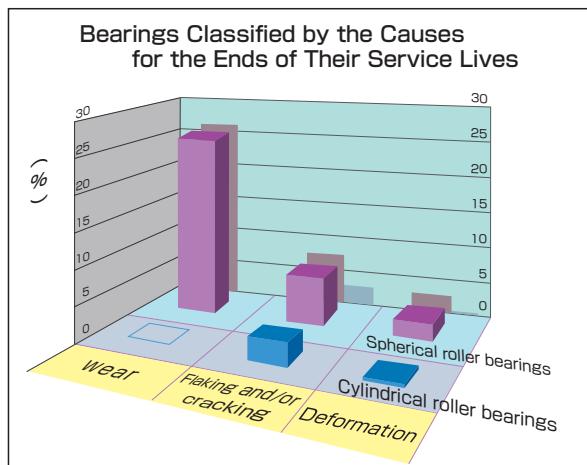


Fig. 4 Advantages of Cylindrical Roller Bearings

● SCP bearing at fixed side

This bearing is designed based on a full complement cylindrical roller bearing, with reference to maximized static load ratings. Crownings are set up on rolling surface of its rollers, according to the size of loads, which contributes to solve stress concentration at specific location. The ribs provided for the inner and outer rings and loose rib, adjacent to the inner ring, accommodate axial loads.

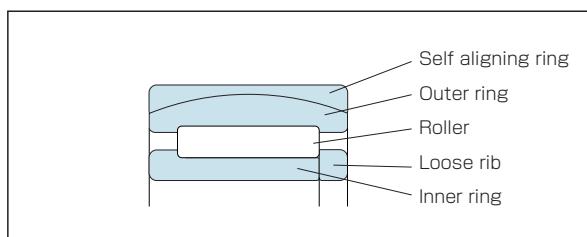


Fig. 5 SCP Bearing Structure

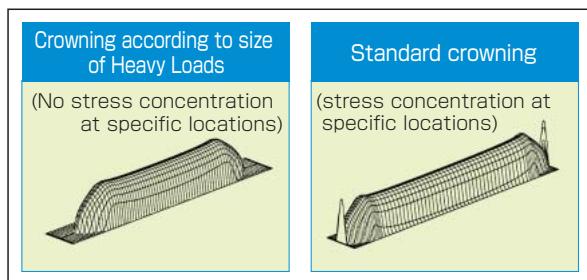


Fig. 6 Advantages of Roller Crowning According to the Size of Heavy Loads

● SC bearing at free side

To accommodate thermal roll contraction and expansion, the inner ring of this bearing are designed to move smoothly in the axial direction.

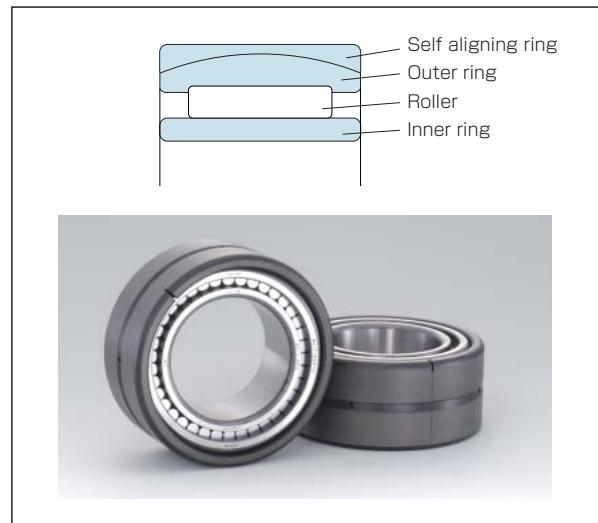


Fig. 7 SC Bearing Structure

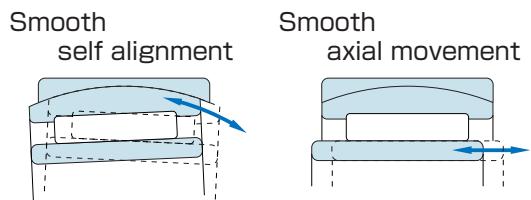


Fig. 8 SC Bearing Functions

(2) HSC bearing units with half-round outer ring

This unit is designed to support the rolls of continuous casting machines at their middle position under heavy loads, and has high cooling efficiency.

This unit has unique structure, with a half-round outer ring placed on the loaded side only.

This special half-round outer ring and compact seal design realizes a 15% increase in static load rating over that of conventional products.

The outside diameter surface of the outer ring is finished spherically, providing a self aligning to the housing.

JTEKT can supply bearing units for all lubrication (grease and oil/air) and lubricant discharge (recovered and non-recovered) systems. Consult us for all your bearing needs.



Fig. 9 HSC bearing Units with Half-round Outer Ring

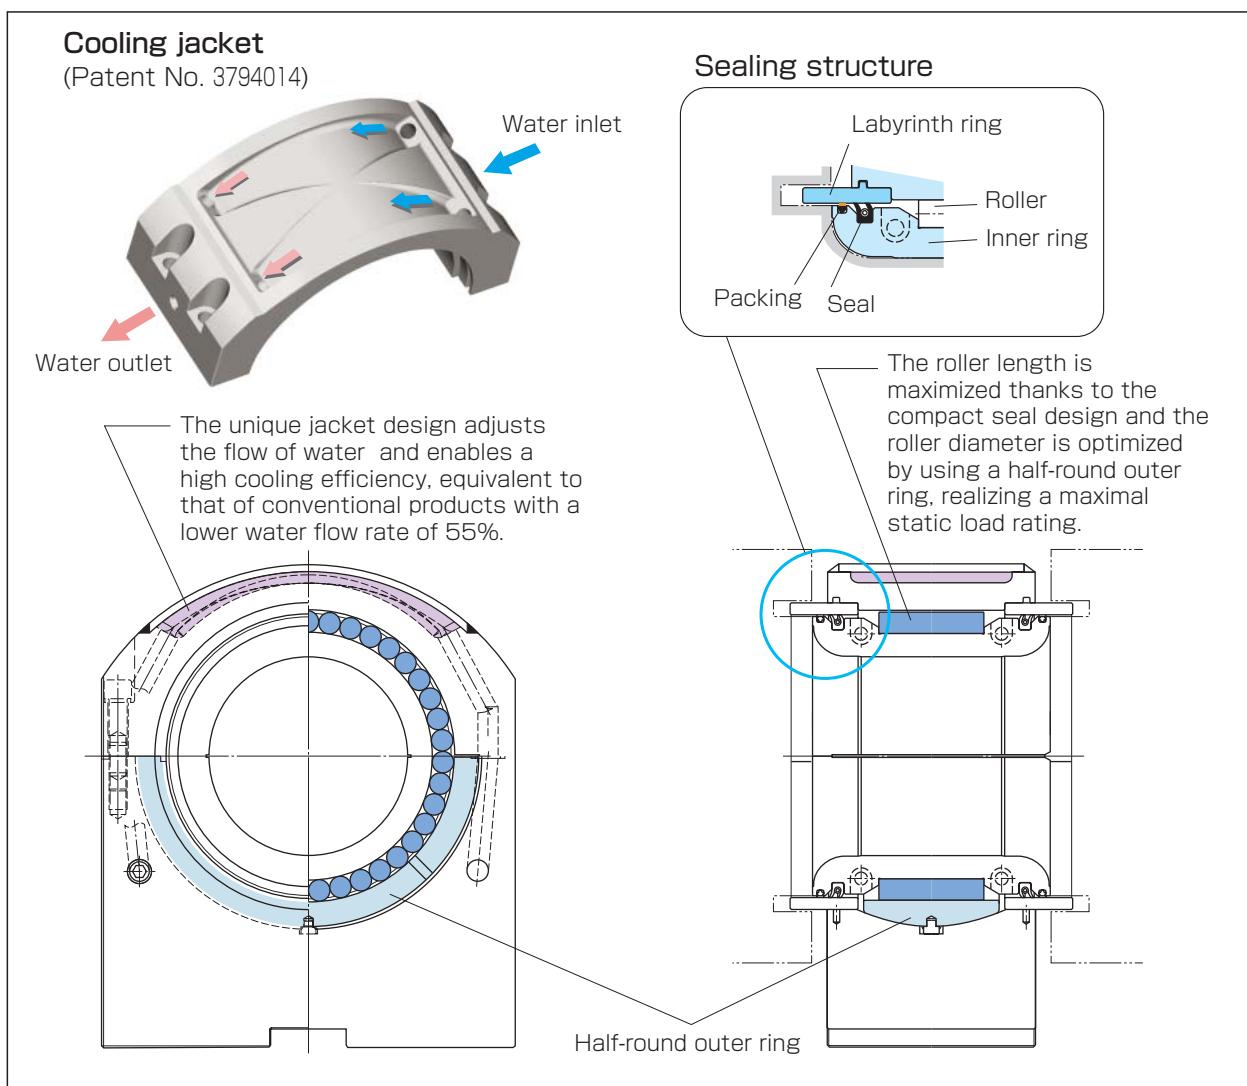


Fig. 10 Structure and Features of the HSC bearing Unit with Half-round Outer Ring

Bearings and Related Products for Continuous Casting Machines

2. High performance Products and Their Features

(3) Oil seals for roll support housings

This oil seal is applied for non grease evacuated type (Called Seal Out Type) housing. The standard material of seal rubber is H-NBR, which well resists to high temperature and stable under steam.

For the roll barrel side, the GE type seal having a dust lip that securely prevents the ingress of water and scales is recommended.

For the roll end side, the ME type seal with a dust lip is recommended.

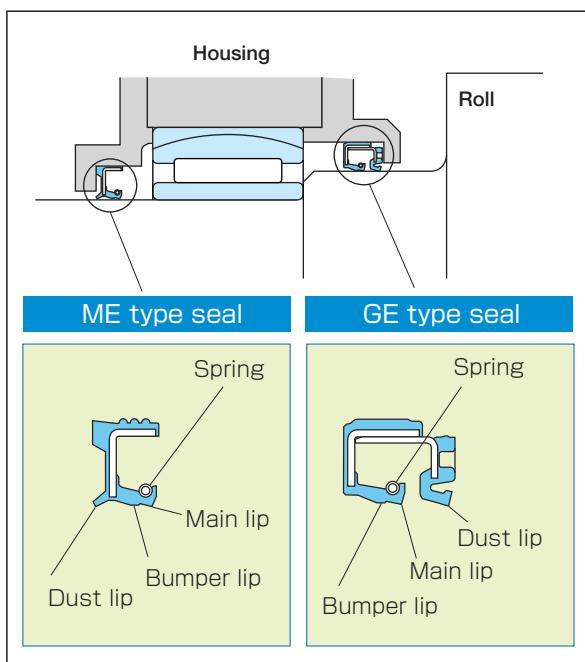


Fig. 11 Type and shape of oil seals

All these oil seals have a main lip equipped with a spring, delaying deterioration in sealing performance due to thermal rubber deformation. The bumper lip adjacent to the main lip distributes contact stress on the roll, delaying roll wear and thus extending sealing durability.

Oil seals applied for grease evacuated type (Called Seal In Type) housing are also available from **JTEKT**. Please contact **JTEKT** for further details.



Fig. 12 GE Type Oil Seal

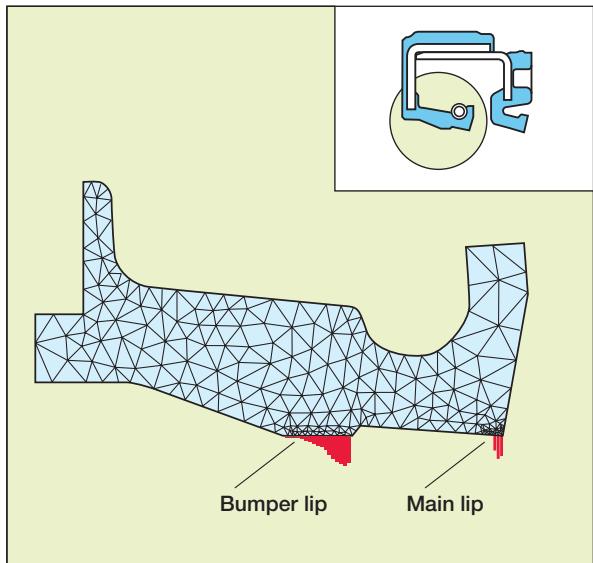


Fig. 13 FEM Analysis for Effects of Bumper Lip

Rust on the raceway of outer and inner rings



Fig. 15 Rust on Spherical Roller Bearing
Caused by Water Ingress

(4) Oil/Air lubrication system

This system supplies lubrication oil into the housing by means of compressed air. Therefore, the internal pressure of the housing is essentially high, preventing the ingress of contaminants.

This lubrication method is the most suitable for bearings used under severe environments where they may be exposed to scattering water and scales.

JTEKT supplies Oil/Air lubrication systems. Please contact **JTEKT** for further details.



Fig. 14 Example of JTEKT Oil/Air Lubrication System

Features of Oil/Air lubrication system

- **Low environmental pollution**
Oil emissions to the atmosphere are low, realizing a clean work environment.
- **Prevention of contaminants ingress into the housing**
Compared with oil mist lubrication and grease lubrication, this system provides the housing interior with a higher pressure, essentially preventing the ingress of contaminants.
- **Less restrictions for piping**
Restrictions on pipe branching are lessened compared with oil mist lubrication.
- **Lubrication oil saving**
Consumption of lubrication oil is reduced.




Fig. 16 Rust on Bearing Supporting Roll at Middle Position

The incidence of the types rust shown in Figures 15 and 16 can be dramatically reduced through the use of high-performance products.

Bearings and Related Products for Continuous Casting Machines

3. Dimensions Tables

SC Bearings and SCP Bearings

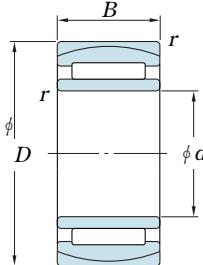


SC Bearing (Free side)


SC Bearings (Free side)

| d | D | B | r (Min.) | Acceptable roll heat expansion (mm) | Basic Load Ratings (kN) | | Bearing No. | Corresponding Spherical Roller Bearing | | | Mass (kg) | Mounting dimensions (mm) | |
|-----|-----|--------|-------------|--|----------------------------|------|-----------------|--|----------------------------|------|--------------|-----------------------------|------------------------|
| | | | | | Cr | Cor | | Bearing No. | Basic Load Ratings (kN) | Cr | Cor | D _a min. | D _a max. |
| 50 | 110 | 40 | 2 | ±4.5 | 164 | 254 | SC101140VA | 22310RHR | 204 | 237 | 2.1 | 96 | 99 |
| 55 | 90 | 32 | 1.1 | ±3.5 | 89.9 | 202 | SC119032VA | — | — | — | 0.9 | 81 | 82 |
| | 100 | 25 | 1.5 | ±4 | 95.9 | 143 | SC111025VA | 22211RHR | 124 | 144 | 0.9 | 93 | 93 |
| 65 | 120 | 31 | 1.5 | ±4 | 118 | 206 | SC131231V-1A | 22213RHR | 178 | 211 | 1.7 | 110 | 111 |
| | 140 | 48 | 2.1 | ±5.5 | 238 | 393 | SC131448VA | 22313RHR | 305 | 360 | 4.0 | 123 | 127 |
| 70 | 125 | 31 | 1.5 | ±6 | 126 | 213 | SC141331VA | 22214RHR | 187 | 222 | 1.8 | 116 | 117 |
| | 150 | 51 | 2.1 | ±7.5 | 273 | 406 | SC141551VA | 22314RHR | 348 | 413 | 4.7 | 132 | 137 |
| 75 | 130 | 31 | 1.5 | ±5 | 148 | 237 | SC151331VA | 22215RHR | 193 | 236 | 1.9 | 120 | 121 |
| 85 | 150 | 65 | 3 | ±8 | 280 | 621 | SC171565VA | 24217RHB | 370 | 558 | 5.4 | 129 | 137 |
| 90 | 160 | 40 | 2 | ±4.5 | 240 | 427 | SC181640-1VA | 22218RHR | 298 | 381 | 3.8 | 147 | 149 |
| | 160 | 45/48* | 2 | ±5.5 | 249 | 507 | SC181645/48V-1A | — | — | — | 4.4 | 147 | 150 |
| | 160 | 52.4 | 2 | ±5.5 | 309 | 555 | SC181652VA | 23218RH | 336 | 482 | 4.9 | 144 | 148 |
| 100 | 150 | 50 | 1.5 | ±6 | 232 | 543 | SC201550VA | — | — | — | 3.4 | 137 | 139 |
| | 165 | 52 | 2 | ±5.5 | 279 | 600 | SC201752V-1A | 23120RH | 328 | 510 | 4.8 | 149 | 153 |
| 105 | 160 | 56 | 2 | ±9 | 242 | 594 | SC211656VA | 24021RHA | 317 | 550 | 4.4 | 144 | 149 |
| 110 | 170 | 45 | 2 | ±5.5 | 260 | 523 | SC221745V-3A | 23022RH | 300 | 486 | 4.0 | 158 | 160 |
| | 170 | 60 | 2 | ±8 | 279 | 722 | SC221760V-1A | 24022RH | 375 | 647 | 5.5 | 152 | 157 |
| | 170 | 64 | 2 | ±10 | 279 | 722 | SC221764VA | — | — | — | 5.8 | 151 | 157 |
| | 180 | 56 | 2 | ±7.5 | 296 | 667 | SC221856V-8A | 23122RH | 385 | 605 | 6.1 | 162 | 167 |
| | 180 | 69 | 2 | ±9 | 355 | 842 | SC221869V-3A | 24122RH | 469 | 778 | 7.6 | 157 | 164 |
| 120 | 180 | 46 | 2 | ±6 | 231 | 588 | SC241846V-2A | 23024RH | 314 | 524 | 4.5 | 168 | 170 |
| | 180 | 54 | 2 | ±12 | 246 | 516 | SC241854VA | — | — | — | 5.0 | 165 | 169 |
| | 180 | 56/46* | 2 | ±10 | 279 | 626 | SC241856/46VA | — | — | — | 5.2 | 165 | 169 |
| | 180 | 58 | 2 | ±8 | 274 | 726 | SC241858V-1A | — | — | — | 5.7 | 164 | 168 |
| | 180 | 60 | 2 | ±9 | 274 | 726 | SC241860V-1A | 24024RH | 397 | 709 | 5.8 | 163 | 168 |
| | 200 | 80 | 2 | ±9.5 | 521 | 1120 | SC242080VA | 24124RH | 605 | 1020 | 11.1 | 174 | 183 |
| 130 | 200 | 69 | 2 | ±9 | 381 | 969 | SC262069V-1A | 24026RH | 512 | 914 | 8.7 | 179 | 186 |
| | 200 | 79/69* | 2 | ±11 | 443 | 1090 | SC262079/69VA | — | — | — | 9.6 | 177 | 185 |
| | 210 | 64 | 2 | ±10 | 408 | 882 | SC262164VA | 23126RH | 494 | 799 | 9.2 | 190 | 196 |
| | 210 | 80 | 2 | ±11.5 | 448 | 1120 | SC262180V-2A | 24126RH | 620 | 1080 | 11.9 | 184 | 193 |
| | 230 | 64 | 3 | ±9 | 442 | 950 | SC262364V-2A | 22226RHR | 658 | 914 | 12.5 | 209 | 215 |
| 140 | 210 | 53 | 2 | ±6 | 331 | 834 | SC282153V-1A | 23028RH | 422 | 723 | 7.1 | 195 | 199 |
| | 210 | 69 | 2 | ±9.5 | 431 | 1010 | SC282169RVA | 24028RH | 524 | 957 | 8.8 | 191 | 196 |
| | 225 | 68 | 2.1 | ±7 | 512 | 1150 | SC282368RVA | 23128RH | 565 | 940 | 11.1 | 204 | 210 |
| | 225 | 85 | 2.1 | ±11.5 | 521 | 1300 | SC282385V-1A | 24128RH | 702 | 1220 | 14.4 | 199 | 208 |
| 150 | 225 | 75 | 2.1 | ±9 | 492 | 1220 | SC302375V-6A | 24030RH | 593 | 1100 | 11.4 | 203 | 209 |
| | 250 | 100 | 2.1 | ±14 | 666 | 1650 | SC3025100V-1A | 24130RH | 915 | 1590 | 21.9 | 218 | 230 |
| | 270 | 96 | 3 | ±12 | 806 | 1670 | SC302796VA | 23230RH | 959 | 1540 | 26.2 | 236 | 247 |
| 160 | 240 | 80 | 2.1 | ±13 | 542 | 1280 | SC322480-2VA | 24032RH | 679 | 1270 | 13.6 | 216 | 225 |
| | 270 | 109 | 2.1 | ±13.5 | 867 | 1980 | SC3227109VA | 24132RH | 1070 | 1890 | 28.0 | 233 | 247 |
| | 340 | 114 | 4 | ±15 | 1230 | 2300 | SC3234114VA | 22332RHA | 1420 | 1940 | 55.3 | 303 | 316 |

Note * indicates width of outer ring and inner ring, respectively.

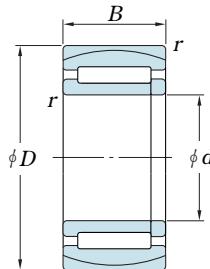

SCP Bearing (Fixed side)



Mounting

SC Bearings (Free side)


| Boundary Dimensions (mm) | | | | Acceptable roll heat expansion (mm) | Basic Load Ratings (kN) | | Bearing No. | Corresponding Spherical Roller Bearing | | | Mass (kg) | Mounting dimensions (mm) | |
|--------------------------|-----|-----|----------|-------------------------------------|-------------------------|------|---------------|--|------|------|-----------|--------------------------|---------|
| d | D | B | r (Min.) | | Cr | Cor | | Bearing No. | Cr | Cor | | Da min. | Da max. |
| 170 | 260 | 90 | 2.1 | ±14 | 622 | 1560 | SC342690V-1A | 24034RH | 828 | 1540 | 18.7 | 232 | 241 |
| | 310 | 110 | 4 | ±14 | 1010 | 2180 | SC3431110VA | 23234RHA | 1210 | 1940 | 40.1 | 270 | 285 |
| 180 | 280 | 100 | 2.1 | ±14 | 743 | 1890 | SC3628100V-1A | 24036RH | 984 | 1830 | 25.0 | 248 | 260 |
| | 320 | 112 | 4 | ±15 | 950 | 2350 | SC3632112V-1A | 23236RHA | 1320 | 2170 | 43.5 | 280 | 295 |
| 190 | 290 | 100 | 2.1 | ±14 | 768 | 2030 | SC3829100V-1A | 24038RHA | 1010 | 1920 | 26.1 | 259 | 269 |
| | 320 | 104 | 3 | ±12 | 1030 | 2270 | SC3832104VA | 23138RHA | 1210 | 2080 | 37.2 | 288 | 298 |
| | 320 | 128 | 4 | ±15.5 | 1120 | 2790 | SC3832128VA | 24138RHA | 1460 | 2630 | 46.7 | 278 | 293 |
| | 340 | 120 | 4 | ±16 | 1110 | 2720 | SC3834120V-1A | 23238RHA | 1490 | 2470 | 53.0 | 301 | 315 |
| 200 | 310 | 109 | 2.1 | ±11 | 978 | 2550 | SC403111RVA | 24040RHA | 1180 | 2230 | 33.5 | 273 | 286 |
| | 340 | 112 | 3 | ±16 | 1080 | 2490 | SC4034112V-1A | 23140RHA | 1380 | 2340 | 46.0 | 304 | 317 |
| | 340 | 140 | 3 | ±19 | 1350 | 3090 | SC4034140VA | 24140RHA | 1660 | 2970 | 56.1 | 292 | 313 |
| 220 | 370 | 150 | 4 | ±19 | 1540 | 3750 | SC4437150VA | 24144RHA | 1920 | 3550 | 72.3 | 320 | 340 |

SCP Bearings (Fixed side)

| Boundary Dimensions (mm) | | | | Acceptable roll heat expansion (mm) | Basic Load Ratings (kN) | | Bearing No. | Corresponding Spherical Roller Bearing | | | Mass (kg) | Mounting dimensions (mm) | |
|--------------------------|-----|------|----------|-------------------------------------|-------------------------|------|----------------|--|------|------|-----------|--------------------------|---------|
| d | D | B | r (Min.) | | Cr | Cor | | Bearing No. | Cr | Cor | | Da min. | Da max. |
| 85 | 150 | 65 | 3 | — | 280 | 621 | SCP171565VA | 24217RHB | 370 | 558 | 5.5 | 129 | 137 |
| | 160 | 40 | 2 | — | 194 | 400 | SCP181640V-1A | 22218RHR | 298 | 381 | 3.9 | 147 | 149 |
| 90 | 160 | 52.4 | 1.1 | — | 271 | 566 | SCP181652V-2A | 23218RH | 336 | 482 | 5.1 | 144 | 148 |
| | 100 | 50 | 1.5 | — | 232 | 543 | SCP201550VA | — | — | — | 3.4 | 137 | 139 |
| 110 | 170 | 45 | 2 | — | 260 | 523 | SCP221745V-3A | 23022RH | 300 | 486 | 4.1 | 158 | 160 |
| | 180 | 69 | 2 | — | 355 | 842 | SCP221869V-3A | 24122RH | 469 | 778 | 7.8 | 157 | 164 |
| | 200 | 53 | 2.1 | — | 333 | 626 | SCP222053VA | 22222RHR | 491 | 642 | 8.2 | 182 | 187 |
| 120 | 180 | 46 | 2 | — | 231 | 588 | SCP241846V-2A | 23024RH | 314 | 524 | 4.6 | 168 | 170 |
| | 200 | 80 | 2 | — | 431 | 1040 | SCP242080V-3A | 24124RH | 605 | 1020 | 12.0 | 174 | 183 |
| 130 | 200 | 52 | 2 | — | 295 | 701 | SCP262052V-1A | 23026RH | 404 | 674 | 6.7 | 186 | 189 |
| | 200 | 69 | 2 | — | 381 | 969 | SCP262069V-1A | 24026RH | 512 | 914 | 8.9 | 179 | 186 |
| | 210 | 80 | 2 | — | 448 | 1120 | SCP262180V-2A | 24126RH | 620 | 1080 | 12.2 | 184 | 193 |
| 140 | 210 | 53 | 2 | — | 331 | 834 | SCP282153V-1A | 23028RH | 422 | 723 | 7.2 | 195 | 199 |
| | 210 | 69 | 2 | — | 431 | 1010 | SCP282169RVA | 24028RH | 524 | 957 | 9.3 | 191 | 196 |
| | 225 | 68 | 2.1 | — | 465 | 1020 | SCP282368V-1A | 23128RH | 565 | 940 | 11.6 | 204 | 210 |
| | 225 | 85 | 2.1 | — | 521 | 1300 | SCP282385V-1A | 24128RH | 702 | 1220 | 14.8 | 199 | 208 |
| 150 | 225 | 75 | 2.1 | — | 492 | 1220 | SCP302375V-6A | 24030RH | 593 | 1100 | 11.8 | 203 | 209 |
| 170 | 260 | 90 | 2.1 | — | 622 | 1560 | SCP342690V-1A | 24034RH | 828 | 1540 | 19.1 | 232 | 241 |
| 180 | 320 | 112 | 4 | — | 950 | 2350 | SCP3632112V-1A | 23236RHA | 1320 | 2170 | 44.1 | 280 | 295 |
| 190 | 290 | 75 | 2.1 | — | 595 | 1530 | SCP382975V-1A | 23038RHA | 789 | 1430 | 20.3 | 268 | 274 |
| | 290 | 100 | 2.1 | — | 768 | 2030 | SCP3829100V-1A | 24038RHA | 1010 | 1920 | 26.8 | 259 | 269 |
| | 320 | 128 | 4 | — | 1120 | 2790 | SCP3832128VA | 24138RHA | 1460 | 2630 | 47.8 | 278 | 293 |
| 200 | 310 | 82 | 2.1 | — | 692 | 1810 | SCP403182VA | 23040RHA | 940 | 1680 | 25.9 | 282 | 291 |

3. Dimensions Tables

HSC bearing Units with
Half-round Outer Ring

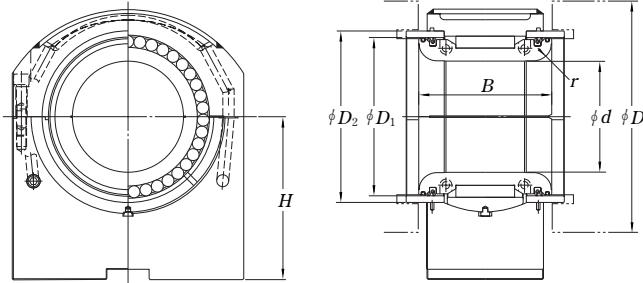

| Boundary Dimensions (mm) | | | | | | | | Housing No. 1) | Seal type | | Bearing No. | Acceptable roll heat expansion (mm) | Basic Load Ratings (kN) | |
|--------------------------|------------------|-------------------|--------------------|-----------------------|-----------------------|---------------------------|---------------|-------------------|-----------|------------------------|-------------|-------------------------------------|-------------------------|------------------------|
| Roll Dia. <i>D</i> | Bore <i>d</i> | Width <i>B</i> | Height <i>H</i> | <i>D</i> ₁ | <i>D</i> ₂ | <i>r</i> ²⁾ | Recovery type | Non-Recovery type | <i>Cr</i> | <i>C</i> _{or} | | | <i>Cr</i> | <i>C</i> _{or} |
| 195 | 100 | 145 | 175 | 133 | 143 | C8* | PBA391H | — | ○ | HSC2017-1C3 | ±7 | 373 | 876 | |
| 220 | 110 | 139 | 225 | 155 | 168 | 18 | PBA399H | ○ | — | HSC2219-7C3 | ±9 | 402 | 876 | |
| | 110 | 139 | 225 | 155 | 168 | 18 | PBA360H | ○ | — | HSC2219-6C3 | ±9 | 433 | 966 | |
| 225 | 100 | 169 | 132 | 140 | 150 | 15 | PBA328H | — | ○ | HSC2019C3 | ±8 | 603 | 1250 | |
| 230 | 110 | 113 | 185 | 160 | 173 | 13 | PBA171H | — | ○ | HSC2219-3C3 | ±8 | 337 | 619 | |
| | 110 | 141 | 246 | 160 | 173 | 18 | PBA171AXH | ○ | — | HSC2219-8C3 | ±8 | 337 | 619 | |
| | 110 | 148 | 351 | 160 | 173 | 13 | PBA171AH | — | ○ | HSC2219-1C3 | ±8 | 528 | 1120 | |
| | 110 | 150 | 190 | 160 | 173 | 15 | PBA208H | ○ | — | HSC2219-9C3 | ±8 | 421 | 846 | |
| | 110 | 154 | 180 | 160 | 173 | 20 | PBA368H | — | ○ | HSC2219-4C3 | ±8 | 554 | 1190 | |
| | 110 | 154 | 180 | 160 | 173 | 20 | PBA404H | ○ | — | HSC2220C3 | ±9 | 575 | 1270 | |
| | 140 | 145 | 175 | 175 | 186.5 | C8* | PBA339H | — | ○ | HSC2821C3 | ±5 | 431 | 1160 | |
| 240 | 115 | 202 | 251 | 160 | 175 | 15 | PBA316H | — | ○ | HSC2321C3 | ±10 | 745 | 1550 | |
| | 120 | 173 | 230 | 165 | 180 | 15 | PBA396H | ○ | — | HSC2321-2C3 | ±10 | 745 | 1550 | |
| 250 | 120 | 151 | 190 | 172 | 185 | 20 | PBA411H | ○ | — | HSC2421-6C3 | ±9 | 576 | 1310 | |
| | 120 | 153 | 185 | 175 | 190 | 20 | PBA336H | — | ○ | HSC2421C3 | ±8 | 651 | 1380 | |
| | 120 | 153 | 145 | 175 | 190 | 20 | PBA336AH | — | ○ | HSC2421-1C3 | ±10 | 578 | 1190 | |
| | 120 | 154 | 175 | 170 | 188 | 20 | PBA378H | ○ | — | HSC2421-4C3 | ±9 | 605 | 1400 | |
| | 120 | 154 | 190 | 175 | 190 | 20 | PBA251H-2 | ○ | — | HSC2421-3C3 | ±9 | 605 | 1400 | |
| | 120 | 154 | 180 | 175 | 190 | 20 | PBA251H | — | ○ | HSC2421-5C3 | ±9 | 605 | 1400 | |
| | 120 | 154 | 180 | 170 | 185 | 20 | PBA407H | ○ | — | HSC2522C3 | ±9 | 793 | 1740 | |
| 255 | 125 | 174 | 180 | 180 | 195 | 20 | PBA410H | ○ | — | HSC2421-1C3 | ±10 | 578 | 1190 | |
| 260 | 120 | 154 | 180 | 170 | 188 | 20 | PBA379H | ○ | — | HSC2622-2C3 | ±9 | 623 | 1480 | |
| 265 | 130 | 157 | 180 | 185 | 200 | 20 | PBA412H | ○ | — | HSC2823-2C3 | ±9 | 699 | 1640 | |
| 270 | 140 | 175 | 242.5 | 190 | 205 | 20 | PBA397H | ○ | — | HSC2823-1C3 | ±7 | 721 | 1710 | |
| | 140 | 191 | 250 | 190 | 205 | 20 | PBA355H | — | ○ | HSC2622C3 | ±9 | 623 | 1480 | |
| | 130 | 154 | 190 | 185 | 200 | 20 | PBA252H | — | ○ | HSC2823C3 | ±8 | 505 | 992 | |
| | 140 | 126 | 205 | 199 | 212 | 16 | PBA176H | ○ | — | HSC2823-3C3 | ±8 | 505 | 992 | |
| 275 | 140 | 174 | 205 | 199 | 212 | 20 | PBA207H | — | ○ | HSC2824-1C3 | ±8 | 863 | 1980 | |
| | 150 | 163 | 175 | 190 | 203.5 | C10* | PBA389H | — | ○ | HSC2824-4C3 | ±8 | 863 | 1980 | |
| | 130 | 174 | 205 | 185 | 200 | 20 | PBA337H | — | ○ | HSC3024C3 | ±7 | 711 | 1800 | |
| | 130 | 174 | 160 | 185 | 200 | 20 | PBA337AH | — | ○ | HSC2624C3 | ±8 | 846 | 1910 | |
| 280 | 145 | 196 | 260 | 200 | 215 | 20 | PBA356H | — | ○ | HSC2925-1C3 | ±6 | 840 | 1930 | |
| | 140 | 139 | 215 | 208 | 223 | 16 | PBA177H | — | ○ | HSC2825C3 | ±8 | 863 | 1980 | |
| | 145 | 178 | 215 | 208 | 223 | 20 | PBA206H | ○ | — | HSC2825-1C3 | ±8 | 863 | 1980 | |
| | 145 | 178 | 215 | 208 | 223 | 20 | PBA357H | — | ○ | HSC2925C3 | ±8 | 967 | 2260 | |
| 295 | 145 | 208 | 270 | 200 | 215 | 20 | PBA408H | — | ○ | HSC2926C3 | ±6 | 880 | 2260 | |
| 305 | 150 | 169 | 205 | 205 | 220 | 20 | PBA338H | — | ○ | HSC3025C3 | ±8.5 | 855 | 1990 | |
| 310 | 140 | 184 | 215 | 205 | 220 | 20 | PBA338AH | — | ○ | HSC2827C3 | ±8 | 1000 | 2210 | |
| | 140 | 184 | 175 | 205 | 220 | 20 | PBA380H | — | ○ | HSC3028C3 | ±9 | 1040 | 2370 | |
| 320 | 150 | 187 | 220 | 220 | 235 | 20 | PBA178H | — | ○ | HSC3228C3 | ±8 | 816 | 1680 | |
| | 160 | 150 | 291 | 240 | 255 | 18 | PBA398H | ○ | — | HSC3228-2C3 | ±8 | 816 | 1680 | |
| | 160 | 199 | 270 | 215 | 230 | 20 | PBA358H | — | ○ | HSC3227C3 | ±9 | 1000 | 2410 | |
| | 165 | 228 | 280 | 230 | 245 | 25 | PBA359H | — | ○ | HSC3328C3 | ±6 | 1030 | 2550 | |
| 340 | 180 | 235 | 280 | 245 | 260 | 25 | PBA324H | — | ○ | HSC3630C3 | ±6 | 1140 | 2720 | |
| 370 | 190 | 233 | 280 | 326 | 336 | 20 | PBA384C3 | — | ○ | HSC3834C3 | ±7 | 1540 | 3540 | |

Notes 1) The housing numbers do not include a bearing.

2) * indicates a special design.

GLOBAL NETWORK BEARING BUSINESS OPERATIONS

JTEKT CORPORATION NAGOYA HEAD OFFICE
No.7-1, Meieki 4-chome, Nakamura-ku, Nagoya, Aichi 450-8515,
JAPAN
TEL : 81-52-527-1900
FAX : 81-52-527-1911

JTEKT CORPORATION OSAKA HEAD OFFICE
No.5-8, Minamisemba 3-chome, Chuo-ku, Osaka 542-8502,
JAPAN
TEL : 81-6-6271-8451
FAX : 81-6-6245-3712

Sales & Marketing Headquarters
No.5-8, Minamisemba 3-chome, Chuo-ku, Osaka 542-8502,
JAPAN
TEL : 81-6-6245-6087
FAX : 81-6-6244-9007

OFFICES

KOYO CANADA INC.
5324 South Service Road, Burlington, Ontario L7L 5H5, CANADA
TEL : 1-905-681-1121
FAX : 1-905-681-1392

KOYO CORPORATION OF U.S.A.

-Cleveland Office-
29570 Clemens Road, P.O.Box 45028 Westlake,
OH 44145, U.S.A.
TEL : 1-440-835-1000
FAX : 1-440-835-9347

-Detroit Office-
47771 Halyard Drive, Plymouth, MI 48170, U.S.A.
TEL : 1-734-454-1500
FAX : 1-734-454-4076

KOYO MEXICANA, S.A. DE C.V.
Rio Nazas No.171, 3er piso, Col. Cuauhtemoc, M xico, D.F. C.P.
06500, M XICO
TEL : 52-55-5207-3860
FAX : 52-55-5207-3873

KOYO LATIN AMERICA, S.A.
Edificio Banco del Pacifico Planta Baja, Calle Aquilino de la
Guardia y Calle 52, Panama, REPUBLICA DE PANAMA
TEL : 507-208-5900
FAX : 507-264-2782/507-269-7578

KOYO ROLAMENTOS DO BRASIL LTDA.
Av. Reboucas 2472 Jardim America, Sao Paulo, BRASIL
TEL : 55-11-3372-7500
FAX : 55-11-3887-3039

KOYO BEARINGS INDIA PVT. LTD.
C/o Stylus Commercial Services PVT LTD, Ground Floor, The
Beech, E-1, Manyata Embassy Business Park, Outer Ring Road,
Bengaluru-560045, INDIA
TEL : 91-80-4276-4567 (Reception Desk of Service Office)
FAX : 91-80-4276-4568

JTEKT (THAILAND) CO., LTD.
172/1 Moo 12 Tambol Bangwua, Amphur Bangpakong,
Chachoengsao 24180, THAILAND
TEL : 66-38-533-310-7
FAX : 66-38-532-776

PT. JTEKT INDONESIA
MM2100 Industrial Town Block DD-3, Cikarang Barat, Bekasi
17520, INDONESIA
TEL : 62-21-8998-3273
FAX : 62-21-8998-3274

KOYO SINGAPORE BEARING (PTE.) LTD.
27, Penjuru Lane, #09-01 C&P Logistics Hub 2, SINGAPORE
609195
TEL : 65-6274-2200
FAX : 65-6862-1623

KOYO MIDDLE EAST FZCO
6EA 601 Dubai Airport Free Zone, P.O. Box 54816, Dubai, U.A.E.
TEL : 971-4-2993600
FAX : 971-4-2993700

PHILIPPINE KOYO BEARING CORPORATION

6th Floor One World Square Building, #10 Upper McKinley Road,
McKinley Town Center, Fort Bonifacio, 1634 Taguig City,
PHILIPPINES
TEL : 63-2-856-5046/5047
FAX : 63-2-856-5045

JTEKT KOREA CO., LTD.

Inwoo Building 6F, 539-11, Shinsa-Dong,
Kangnam-Ku, Seoul, KOREA
TEL : 82-2-549-7922
FAX : 82-2-549-7923

JTEKT (CHINA) CO., LTD.

Room.25A2, V-CAPITAL Building, 333 Xianxia Road, Changning
District, Shanghai, CHINA
TEL : 86-21-5178-1000
FAX : 86-21-5178-1008

KOYO (SHANGHAI) CO., LTD.

Room.25A2, V-CAPITAL Building, 333 Xianxia Road, Changning
District, Shanghai, CHINA
TEL : 86-21-5178-1000
FAX : 86-21-5178-1008

KOYO AUSTRALIA PTY. LTD.

Unit 2, 8 Hill Road , Homebush Bay, NSW 2127, AUSTRALIA
TEL : 61-2-8719-5300
FAX : 61-2-8719-5333

JTEKT EUROPE BEARINGS B.V.

Markerkant 13-01, 1314 AL Almere, THE NETHERLANDS
TEL : 31-36-5383333
FAX : 31-36-5347212

-KOYO BENELUX BRANCH OFFICE-

Energieweg 10a, 2964LE, Groot-Ammers, P.O. Box 1, 2965ZG
Nieuwpoort, THE NETHERLANDS
TEL : 31-184606800
FAX : 31-184606857

-KOYO ROMANIA REPRESENTATIVE OFFICE-

Str. Dr. Lister nr. 24, ap. 1, sector 5, cod 050543, Bucharest,
ROMANIA
TEL : 40-21-4104182
FAX : 40-21-4101178

KOYO KULLAGER SCANDINAVIA A.B.

Johanneslundsv gen 4, 194 61 Upplands V sby, SWEDEN
TEL : 46-8-594-212-10
FAX : 46-8-594-212-29

KOYO (U.K.) LTD.

Whitehall Avenue, Kingston, Milton Keynes MK10 OAX,
UNITED KINGDOM
TEL : 44-1908-289300
FAX : 44-1908-289333

KOYO DEUTSCHLAND GMBH.

Bargkoppelweg 4, D-22145 Hamburg, GERMANY
TEL : 49-40-67-9090-0
FAX : 49-40-67-9203-0

KOYO FRANCE S.A.

6 Avenue du Marais BP20189 95100 Argenteuil Cedex, FRANCE
TEL : 33-1-3998-4202
FAX : 33-1-3998-4244/4249

KOYO IBERICA, S.L.

Avda.da la Industria, 52-2 izda 28820
Coslada Madrid, SPAIN
TEL : 34-91-329-0818
FAX : 34-91-747-1194

KOYO ITALIA S.R.L.

Via Stephenson 43/a 20157 Milano, ITALY
TEL : 39-02-2951-0844
FAX : 39-02-2951-0954

Koyo® Bearings and Related Products for Continuous Casting Machines

Value & Technology



JTEKT

CAT.NO.B2011E
Printed in Japan '12.2-7BM('05.2)